



Dettaglio di prodotto

Tessuti e Strutture

CAMPIONARIO TESSUTI TECNICI

STAM 6002
TRANSLUCENT




6002 - 20183 White

6002 - 10387 Vanille

6002 - 20186 Bordeaux

6002 - 20189 Navy



FS FLEXY




FS - 1210 White

FS - 1230 Cream

FS - 1260 Grey

FS - 1480 Green



SOLTIS 86




S86 - 2044 White

S86 - 2135 Sandy


S86 - 2048 Grey

S86 - 2167 Concrete

S86 - 2053 Black



DECORATIVE FABRIC LAYER



SAT - 355 851 140

SAT - 314 917 120

SAT - 320 923 120

FERRARI W96
TRANSLUCENT



W96 - 8102 White


W96 - 1103 Sandy

W96 - 2071 Grey

W96 - 2047 Black



FS FLEXY 3D




3D - 1213 White


3D - 1233 Cream

3D - 1263 Grey

3D - 1483 Green



SOLTIS 92




S92 - 2044 White

S92 - 2135 Sandy

S92 - 2048 Grey

S92 - 2167 Concrete


S92 - 2053 Black



IZO - PRO



SAT - White SAT 666 - 114



SAT - Grey SAT 666 - 832

Exclusive Fabric Collection



PALMIYE



Moonlight Series

Dark Flower M105

PALMIYE



Purity Series

Valentin M207

PALMIYE



Romanza Series

Warm Stone M301

PALMIYE



Moonlight Series

Highgate M101

PALMIYE



Purity Series

Pearl White M201

PALMIYE



Romanza Series

Pearl Grey M305

PALMIYE



Moonlight Series

Silverlight M307

PALMIYE



Purity Series

Smoothie M205



PALMIYE



Romanza Series

Sandy Beach M105

PALMIYE

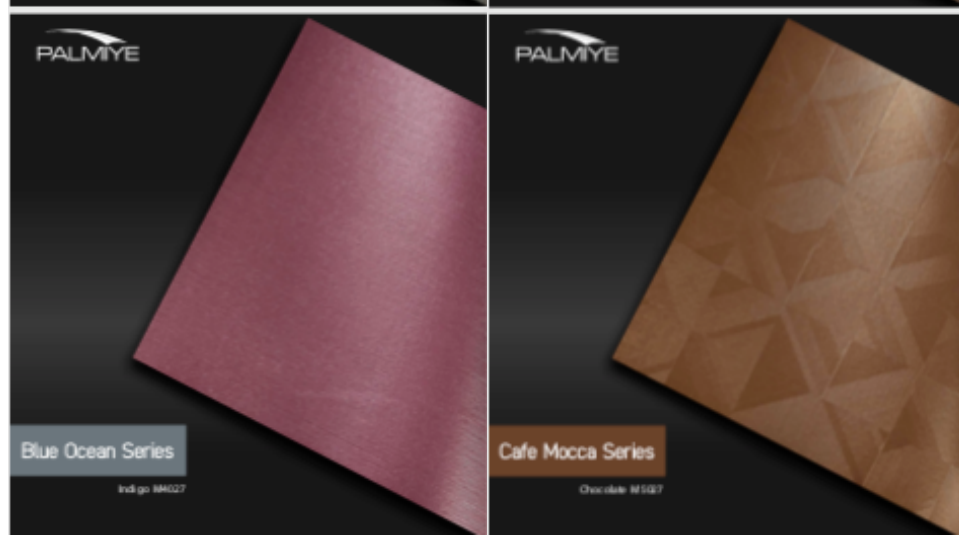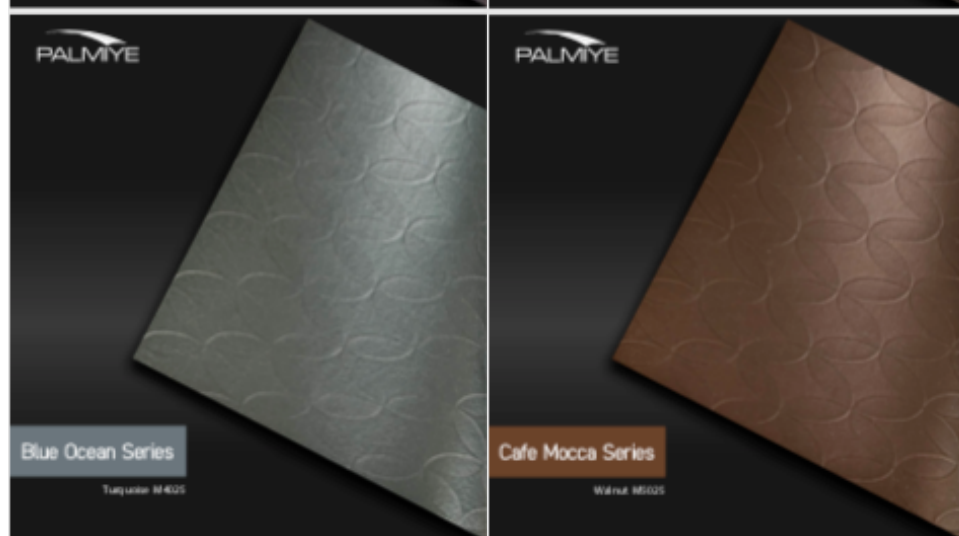

Exclusive Fabric Collection

Exclusive Fabric Collection Outer Color		
Series	Fabric Name	Outer Side Color
Moonlight	Silverlight	Grey (RAL 7046)
	Nightingale	Grey(RAL 7046)
	Dark Flower	Grey(RAL 7046)
Purity	Valentine	White
	Snowflake	White
	Pearl White	White
Romanza	Sandy Beach	White
	Pearl Grey	Grey(RAL 7046)
	Warm Stone	Grey(RAL 7046)
Ocean Blue	Indigo	White
	Turquoise	Grey(RAL 7046)
	Horizon	White
Cafe Mocca	Chocolate	Grey(RAL 7046)
	Wall Nut	Grey(RAL 7046)
	Roasted Coffee	Grey(RAL 7046)

Dettagli colore esterno

Exclusive Fabric Collection

Tessuto in poliestere, spalmato PVC su entrambi i lati e laccato, lato superiore lucido, finissaggio fungicida, difficilmente infiammabile, lato inferiore schiumato

I valori riportati di seguito sono indicativi : vengono forniti a scopo informativo per garantire il miglior utilizzo del prodotto. Possono essere suscettibili di modifiche in linea con i progressi tecnologici, con la tipologia di impiego del materiale e la posizione geografica dell'installazione.

Gtot esterno
0,07
Gtot interno
0,50

TECHNISCHE DATEN / TECHNICAL DATA / SPECIFICHE TECNICHE	Gewebe fabric tessuto	DIN 60001	Kette/warp/ordito: Schuss/weft/trama:	Polyester (PET) Polyester (PET) Poliestere (PET)
	Bindung weave costruzione	DIN ISO 9354		L 1/1 plain weave 1/1 armatura tela 1/1
	Fadenfeinheit linear density titolo del filo	EN ISO 2060	Kette/warp/ordito: Schuss/weft/trama:	1100 dtex 1100 dtex
	Flächengewicht weight peso totale	DIN EN ISO 2286-2		950 g/m ²
	Höchstzugkraft max. tensile strength resistenza alla trazione	DIN EN ISO 1421	Kette/warp/ordito: Schuss/weft/trama:	3000 N/5 cm 3000 N/5 cm
	Weiterreißkraft tear strength resistenza allo strappo iniziato	DIN 53 363	Kette/warp/ordito: Schuss/weft/trama:	300 N 300 N
	Haftung adhesion adesione	DIN EN ISO 2411 (Probe verschweißt)		150 N/10cm
	Kältebeständigkeit cold resistance resistenza al freddo	DIN EN 1876-1		-30° C
	Wärmebeständigkeit heat resistance resistenza al calore	IVK/Pkt. 5		+70° C
	Lichtechtheit light fastness solidità alla luce	DIN EN ISO 105-B02		≥ 7
	Dicke thickness spessore	EN 25084		+ 10 ca. 1,2 mm


Confezioni teli speciali.

Telo a V.

TV 1 Falda

TV 2 Falde alternate

TV 3 Falde alternate 3 guide

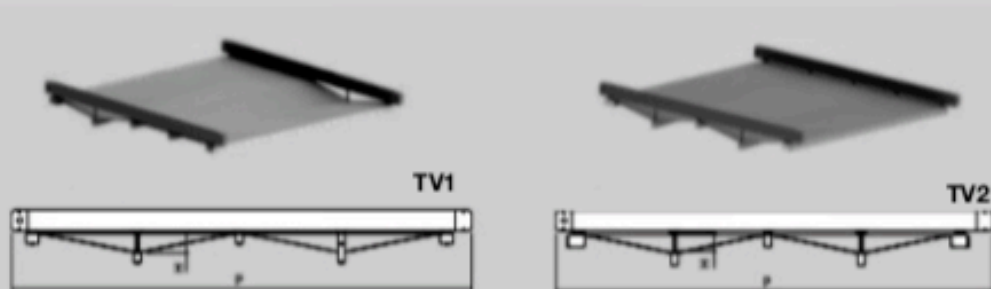



H perno distanziale cm 9

Telo Lasco .

TL 1 Falda

TL 2 Falde alternate

TL 3 Falda su un lato

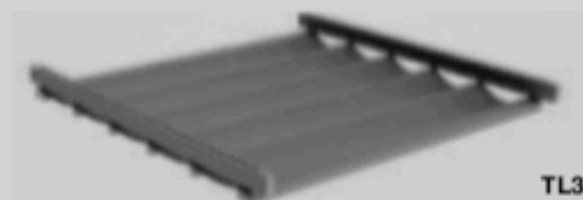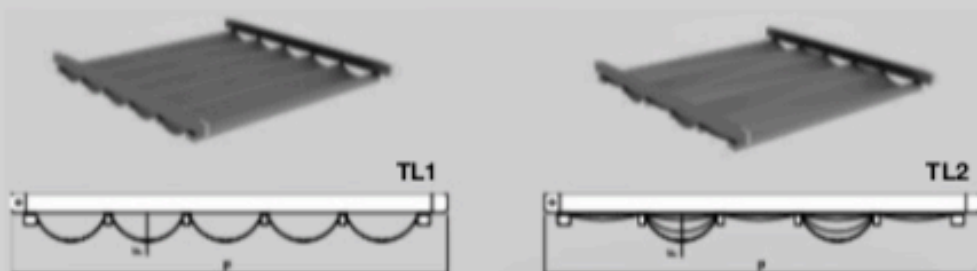

Freccia minima <450 cm 15

Freccia minima <900 cm 20

Freccia minima >900 cm 25

COLORI STRUTTURE

