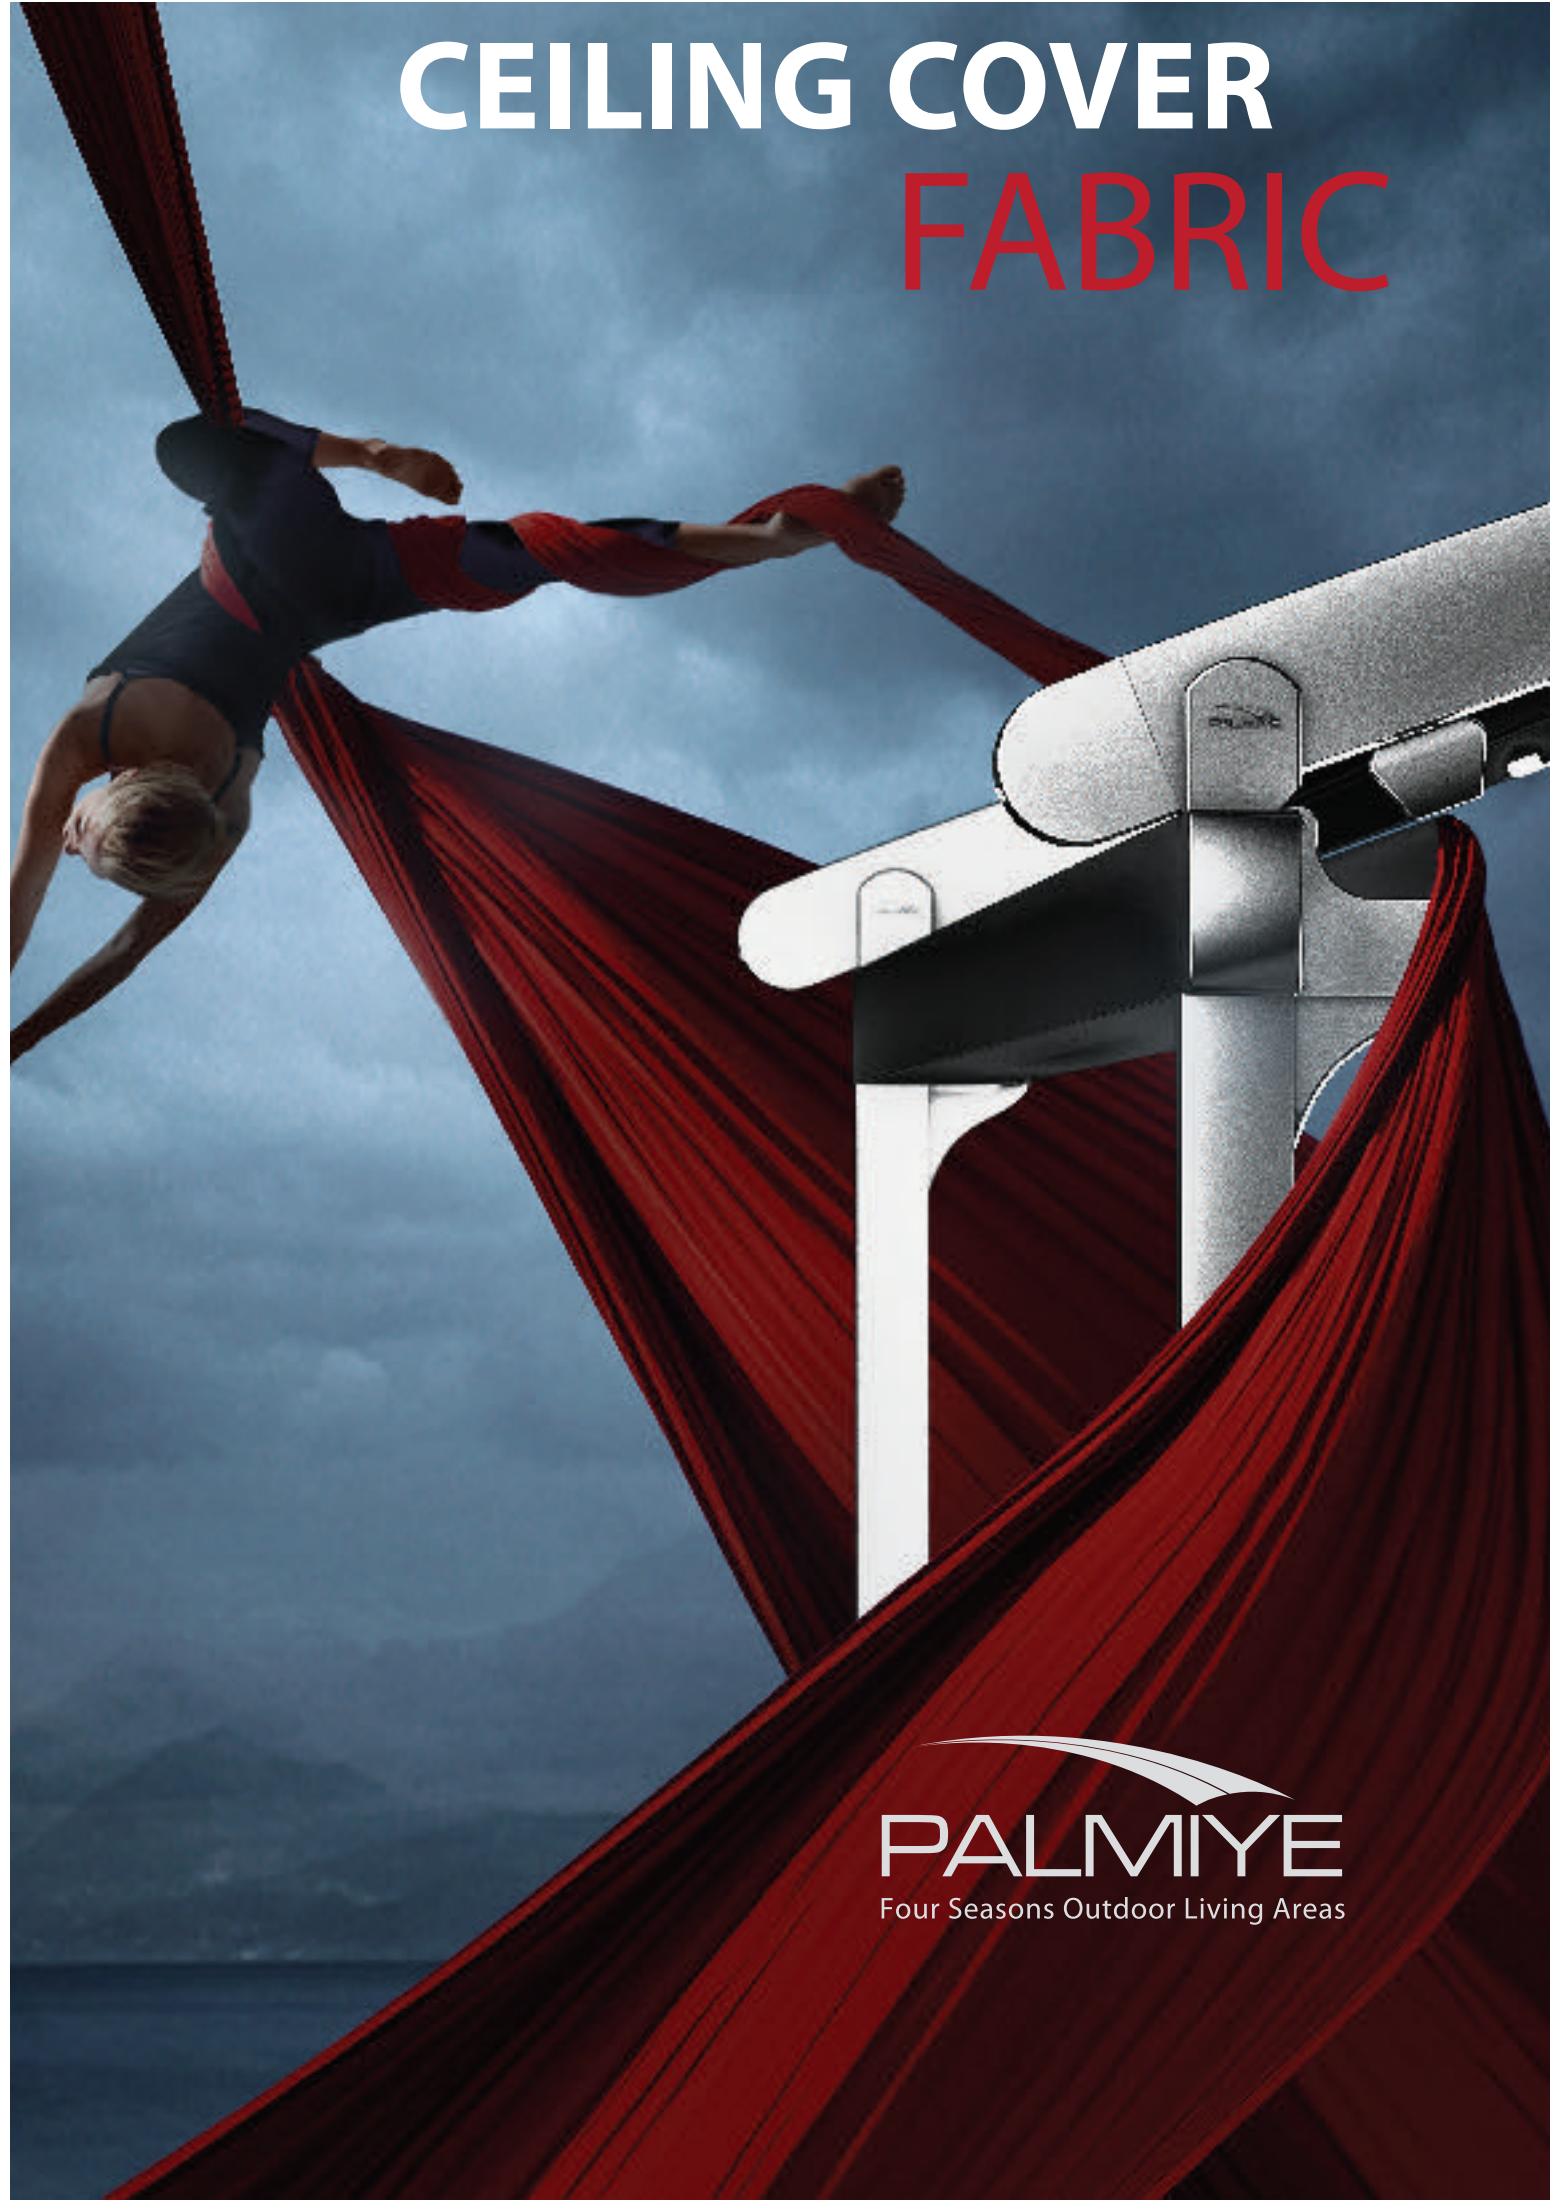


CEILING COVER FABRIC




PALMIYE
Four Seasons Outdoor Living Areas

PERGOLA FABRICS

FS FLEXY

FS Flexy fabric, which is used in textile architecture worldwide, is a lightweight, PVC-based material. Consisting of 3 layers, it is highly weather-resistant while being fully flame retardant and easy to clean.



FS - 1210 White

FS - 1230 Cream

FS - 1260 Grey

FS - 1480 Green

Ral 9010

Ral 1013


Ral 7040

Ral 6005

Standard fabric profile & plastic colours

FS FLEXY 3D

FS Flexy 3D, is a lightweight, pvc based material with 3d effect on one side. Just as Fs flexy, it consists of 3 layers, high weatherproof while fully flame retardant and easy to clean.



Ral 9010

Ral 1013

Ral 7040

Ral 6005

Ral 7040

Ral 1013

Ral 9005

FS - 3D 1213 White

FS - 3D 1233 Cream

FS - 3D 1263 Grey

FS - 3D 1483 Green

FS - 3D 7500 Metallic Grey

FS - 3D 3017 Bordeaux

FS - 3D 7999 Black

Standard fabric profile & plastic colours

STAM 6002

TRANSLUCENT

The Ferrari STAM 6002 Canvas, with its unique woven appearance elevates your project and adds value to it. Its PVDF Surface coating makes it extra durable and provides an exceptional dirt resistance.



PVDF varnish



Phthalate-free



Waterproof



Fireproof



Greenguard certified

6002 - 20183 White

6002 - 10387 Vanille

6002 - 20024 Grey

Ral 9010

Ral 1013

Ral 7040

Standard fabric profile & plastic colours

*Can be used in pergola and awning systems.

*FERRARI W96

TRANSLUCENT

Soltis W96 fabric protects against UV and bad weather, while preserving the level of natural light transmitted. This translucent, waterproof fabric is ideal for pergolas.



Waterproof



Flame retardant



Texyloop recyclable



See through effect

W96 - 8102 White

W96 - 1103 Sandy

W96 - 2171 Grey

W96 - 2047 Black

Standard fabric profile & plastic colours

Ral 9010

Ral 1013

Ral 7040

Ral 9005

*Additional cost apply.

*Can be used in pergola and awning systems.

AWNING FABRICS

SOLTIS 86

Soltis 86 offers unrivalled outward visibility and a level of natural light transmission that is beneficial to user well-being. It blocks the sun and also has a natural citronella scent and acts a subtle insect repellent that gently perfumes the area.



Flame
retardant



Transmission
of up to 28%
natural light



See through
effect

S86 - 2044 White

S86 - 2175 Champagne

S86 - 2135 Sandy

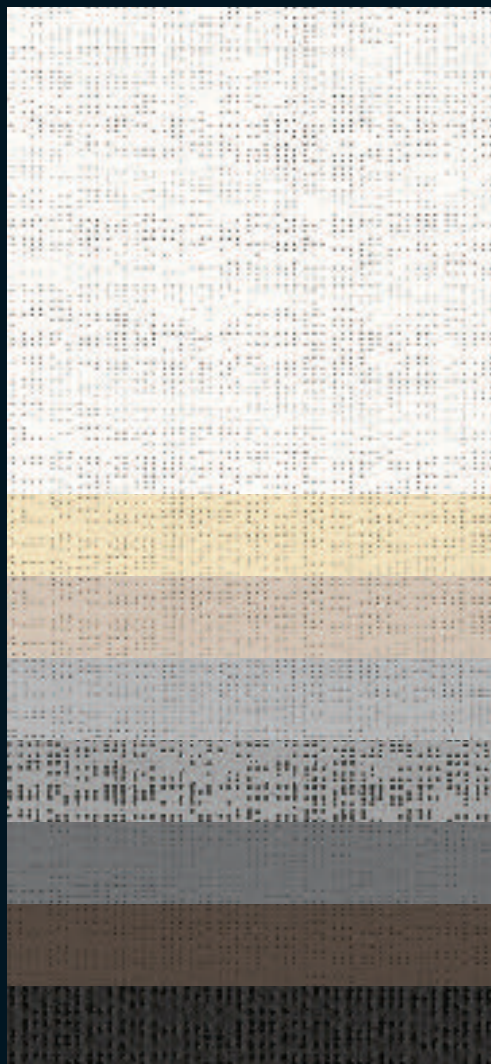
S86 - 2048 Grey

S86 - 2068 Alu/Antrasite

S86 - 2167 Concrete

S86 - 2043 Bronze

S86 - 51176 Black



SOLTIS 92

Soltis 92 acts as an effective thermal shield. It blocks up to 97% of the heat.



Flame
retardant



Fireproof



See through
effect

S92 - 2044 White

S92 - 2175 Champagne

S92 - 2135 Sandy

S92 - 2048 Grey

S92 - 2068 Alu/Antrasite

S92 - 2167 Concrete

S92 - 2043 Bronze

S92 - 51176 Black

AWNING FABRICS

SOLTIS VEOZIP

Optimum thermal comfort to take maximum advantage of your terrace without excessive heat in mid-summer.



Greenguard
certified

Recyclable

Frost white 7605 - 51184

Edelweiss 7605 - 51185

Macadamia 7605 - 51188

Natural 7605 - 51187

Sea lion 7605 - 51192

Lunar surface 7605 - 51191

Shadow 7605 - 51194



ACRYLIC

Our premium awning fabrics are made from 100% solution-dyed branded acrylic. This guarantees top-level functionality, and ourstanding UV protection.



Sustainability

314 010

314 E67

314 030

355 851

308 325

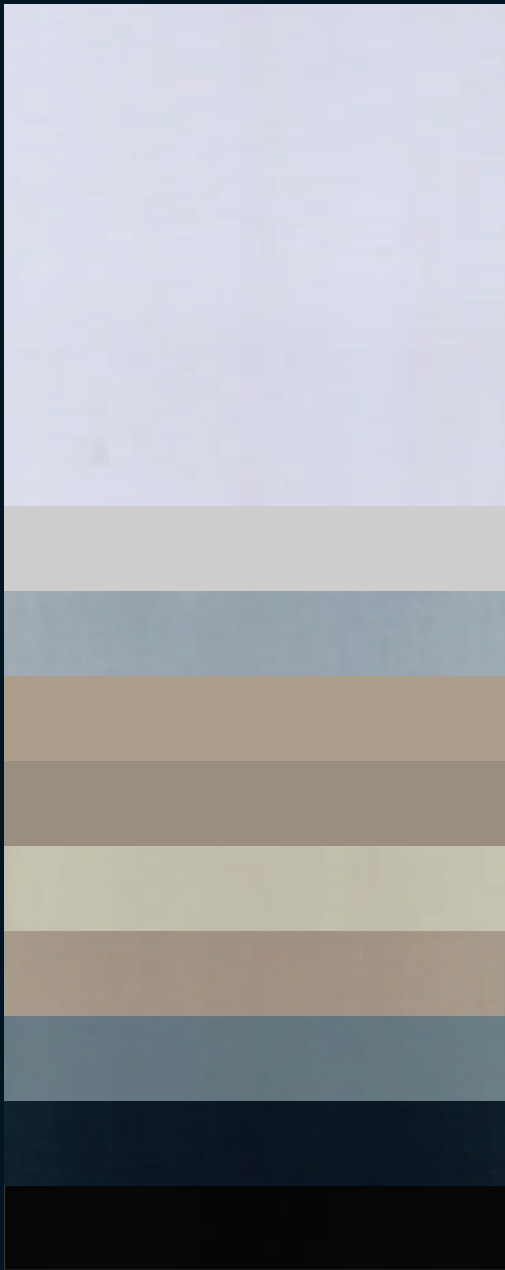
314 851

314 020

314 941

314 398

314 154












*DECORATIVE FABRIC

This exclusive Series of Decorative Fabric can be combined with any other ceiling cover from Palmiye's Collection.



Anti-bacterial

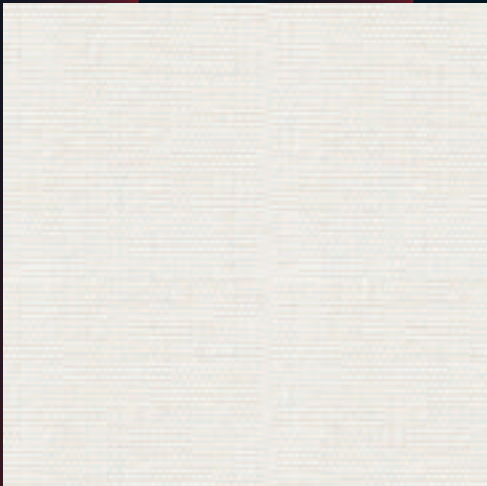100%
FABRIC
ACRYLIC

Deco White 2602		Ral 9010	
Deco Beige Amai 65		Ral 1013	
Deco Cream FL751/602		Ral 1013	
Deco Brown Amai 58		Ral 1013	
Deco Light Grey - 2631		Ral 7040	
Deco Black - Grey Amai - 61		Ral 7040	
Deco Dark Grey - 2700		Ral 9005	
Deco Green - 2497		Ral 6005	

Standard fabric profile & plastic colours

*Additional cost apply.
*Can be used in pergola systems as a second layer.

	Characteristics ABUV/OP	Weight 850 g/m² DIN EN ISO 2286/2 1998	
	Physical Properties	Characteristics ABUV/SOP	
Breaking Strength (Weft / Warp)	230/250 daN/5cm EN ISO 1421/1 1998	Physical Properties	
Tear Strength (Weft / Warp)	270 N / 270 N DIN 53363 2003	Breaking Strength (Weft / Warp)	2500 N/5cm / 2300 N/5cm EN ISO 1421/1 1998
	Fire Behavior	Tear Strength (Weft / Warp)	250 N / 200 N DIN 53363 2003
	M2 NF P 92 507 2004 B1 DIN 4102 1998	Fire Behavior	
	Management Systems	M2 NF P 92 507 2004	
	Quality ISO 9001	Management Systems	
		Quality ISO 9001	
STAM 6002 Translucent		FERRARI W96 Translucent	
	Technical Properties Standards		Technical Properties Standards
	Weight: 630 g/m² EN ISO 2286-2		Weight 620 g/m² EN ISO 2286-2
	Physical Properties		Thickness 0,56 mm
Tensile Strength (Weft - Warp)	250/250 daN/5cm EN ISO 1421	Physical Properties	
Tear Strength (Weft - Warp)	20/20 daN DIN 53.363	Tensile Strength (Weft - Warp)	220/220 daN / 5cm EN ISO 1421
	Flame Retardancy	Tear Strength (Weft - Warp)	20/25 daN DIN 53.363
Rating M2/NFP 92-507 B1/DIN 4102-1 CAN/ULC-S109 METHOD 2/NFPA 701 VKF 5.3/SN 198898		Flame Retardancy	
Classe 2/UNI 9177 BS 7837 1530.3/AS/NZS G1/GOST 30244-94 Class A/ASTM E84 M2/UNE 23		Rating M2 NFP 92-507	
727-90 CSFM T19 • CPAI 84		Management Systems	
Management Systems		Quality ISO 9001	
Quality ISO 9001			
SOLTIS 86		SOLTIS 92	
	Technical Properties Standards		Technical Properties Standards
	Weight: 380 g/m² EN ISO 2286-2		Weight 420 g/m² EN ISO 2286-2
	Thickness 0,45 mm		Thickness 0,45 mm
	Physical Properties		Physical Properties
Tensile Strength (Weft - Warp)	230/160 daN/5cm EN ISO 1421	Tensile Strength (Weft - Warp)	310/210 daN / 5cm EN ISO 1421
Tear Strength (Weft - Warp)	45/20 daN DIN 53.363	Tear Strength (Weft - Warp)	45/20 daN DIN 53.363
	Flame Retardancy	Flame Retardancy	
Rating B1-DIN4102-1 • BS7837 • BS5867 • SCHWERBRENNBAR-Q1-TR1/ONORM A 3800-1 • CLASSE1/UNI9177-87 • M1/UNE23 •727-90 • VKF5.2/SN 198898 • 1530.3/AS/NZS • G1/GOST 30244-94 • METHOD1/NFPA701 • CSFMT19 • CLASS A/ASTM E84		Rating M1/NFP 92-507 — B1/DIN 4102-1 — BS 7837 — BS 5867 — Schwerbrennbar-Q1-Tr1/ONORM A3800-1	
Euroclass B-s2,d0/EN 13501-1		Classe 1/EN 13373 — M1/UNE 23.727-90 — VKF 5.3/SN 198898 — 1530.3/AS/NZS G1/GOST 30244-94 — Method 1/NFPA 701 — CSFM T19 — Class A/ASTM E84	
Management Systems		Euroclass B-s2.d0 EN 13501-1	
Quality ISO 9001		Management Systems	
		Quality ISO 9001	
SOLTIS VEOZIP		ACRYLIC FABRIC	
	Technical Properties Standards		Technical Properties Standards
	Openness factor 5%		30A 314 315 320 364 308 355
	Weight 600 g/m² EN ISO 2286-2		Base PAC PAC PAC DIN 60 001
	Thickness 0,90mm		Weight 290 335 350 DIN EN ISO12127
	Roll widths 290 cm - 320 cm		Width 120 120 140 EN 25084
	Roll length		Physical Properties
Standard format: 290cm roll width 42 lm		Tensile Strength (daN/5cm)	145/100 150/100 160/100 DIN EN ISO 13934-1
Standart format: 320 cm roll width 35 lm		Tear Resistance (daN)	3.5/3.0 3.5/2.5 3.5/3.0 DIN EN ISO 13937-2
	Physical Properties		
Breaking resistance (warp/weft)	250 / 170 daN / 5 cm EC ISO 1421		
Tear Resistance (warp/weft)	25 / 25 daN DIN 53.363		
	Fire Resistance		
Rating M1/NFP 92-507 B1/DIN 4102-1 - BS 7837 - BS 5867 - CUNO/UNI91-77 - Classe 1/EN13373			
Method 1/NFPA701 - CSFMT19 - ClassA/ASTM E84			
Euroclass B-s2,d0 EN13501-1			
Management system			
Quality ISO 9001			